

Marina

Sunlounger

Technical file



FABRIC



STACKABLE



RECLINABLE



SPARE PARTS



CUSTOMIZABLE



RECYCLABLE

Description

Frame

Manufactured with a 1,5 mm thick 6063-20 aluminum alloy profile.

Screws

Manufactured in AISI 304 stainless steel that offers great resistance to corrosion in marine environments.

Paint

Powder paint based on polyester resins that offers great resistance to light and outdoor environments in accordance with QUALICOAT international specifications and ISO-2409 and ISO-2360 regulations.

Fabric

Breathable fabric constructed with double weft and double warp, 1.25 mm thick and 870 g/m² density. Made of a continuous polyester thread core (30%) coated with PVC (70%).

Resistant to UV rays, with a light resistance index of 8.

Antimicrobial protection that protects against bad odors and moisture.

Fire resistance due to flammability retardant according to EN-1021-2:2015 regulations.

Elastic cord

Made of a latex core (69%) coated with polypropylene (31%). Finished with an injected plastic end.

Diameter: 7,2 mm. Density: 3,87 gr/m. Resistance to breakage: 130 kg.

Accessories

Caps, studs and regulators made of polypropylene resin resistant to UV rays.

Safety


Locking system designed to prevent hands and fingers from being caught.

Structure designed to prevent tipping or swaying.

Marina

Sunlounger

Capacity

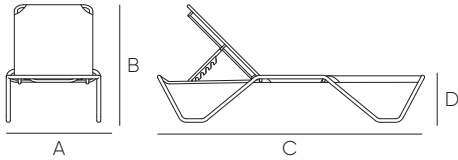

A - 68 cm
B - 82 cm

C - 194 cm
D - 36 cm

9,4 kg


Package	Units	Measures	Weight	Volume
Box	2 u.	196x72x39 cm	19,8 kg	0,62 m ³
Pallet	14 u.	195x71x173 cm	159 kg	2,39 m ³

Loading capacity	Mega trailer	Cont. 20'	Cont. 40'	Cont. 40' High Cube
Marina	520 u.	160 u.	330 u.	440 u.

Finishes

Frame


Matte texture



White Aluminum

Fabric

Basic

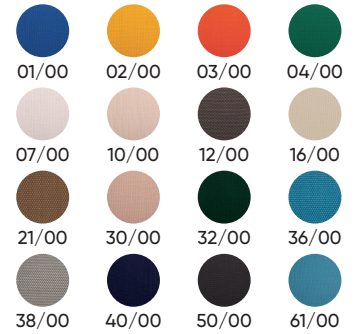



Marina

Sunlounger

Maintenance plan

Weekly

Visual check of the general condition, removing dirt and ensuring there are no broken parts or damage that could be a danger to users.

Monthly

Check fabric tension.
Check the structural strength and stability.
Check the condition of strings.

Annual

Check the condition of the fabric and ensure it is correctly tensed.
Check the backrest and adjuster are working correctly.
Replace any worn or damaged parts.

Wintering and storage

Clean with soapy water and a soft cloth.
Remove damp stains, sand and seawater.
Store horizontally in a dry place in stacks of 10 units.

Observations

- Always use Balliu spare parts.
- Balliu does not manufacture parts for other brands.
- If the product is subject to heavy use, maintenance checks must be carried out more frequently.
- Do not use the product until maintenance is completed.
- Consult the maintenance instructions.
- Do not use aggressive chemicals to clean the product.
- Always use products with a neutral pH.
- Use a soft cloth to clean the product.

